

# CSS-8000 SERIES

## The flagship model of BMB Professional Series

BMB's traditional paper cone manufacturing process is a rigorous selection of high-strength textile materials. Compression driver uses "Neodymium magnet", it will make clear powerful high-sound. High-quality parts carefully selected for the network are used to achieve high stability and excellent durability.

1. The flagship model of BMB Professional Series.
2. Using high quality material for each parts.
3. Recommend to install for luxury demand.




**The Woofer**  
Selected woofer unit for stable delivery of luxurious sound.

**The network**  
Each parts uses high quality material, it is different from other model.



CSS-8012 II [12"]

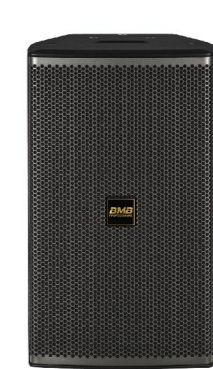

CSS-8010 II [10"]

System	2 Ways 2 Speakers	2 Ways 2 Speakers
Woofer Unit	300mm(12inch) Paper Cone Type x 1unit with 75mm(2.95inch) Coil x 1unit	250mm(10inch) Paper Cone Type x 1unit with 63.5mm(2.3inch) Coil x 1unit
Tweeter Unit	26mm Throat,44.4mm Coil Diaphragm Assembly Type x 1unit	26mm Throat,34.4mm Coil Diaphragm Assembly Type x 1unit
Freq. Response	50Hz~20,000Hz(±3dB)	55Hz~20,000Hz(±3dB)
Sensitivity	98dB/W/m	97dB/W/m
Max SPL Peak	133dB/m	128dB/m
Max SPL Continuous	127dB/m	124dB/m
Max Input Power	1600W	1200W
Rating Input Power	400W(Public Addresses speaker type)	300W(Public Addresses speaker type)
Recommended Amplifier	500W(DAD-500)	500W(DAD-500)
HF Protections	Poly Switch Circuit Breaker	Poly Switch Circuit Breaker
Horizontal Coverage	80°	80°
Vertical Coverage	50°	50°
Connector	Speaker connector (4P) x 2	Speaker connector (4P) x 2
Impedance	8Ω	8Ω
Dimensions (mm)	377.5(W) x 620(H) x 409(D)	314(W) x 520(H) x 345(D)
Weight	22.6 kg per piece	16.02 kg per piece
Enclosure Material	15mm Plywood construction	15mm Plywood construction
Grille	5.5mm Custom Hexagon perforated steel grille	5.5mm Custom Hexagon perforated steel grille
Finish	Paint Finish	Paint Finish
Pole Mount	φ36mm bottom support base	φ36mm bottom support base

